

Backward Curved Centrifugal Fan


110V 2 & 4 Pole Performance

Ball Bearings
 Insulation F class
 Protection IP 44
 Material: Steel Impeller
 Steel Painted Black Scroll



Model Type	Motor	V	Hz	M ³ /hr	RPm	Wi	A	μF/Vac	Pa	dB	Kg
86L2B175AA1100	812BM015	110	60	430	2650	70	0.62	8/250	0	58	1
86L2B190AA6100	812BM015	110	60	570	2385	86	0.8	8/250	0	61	1.6
86L2B225AA1300	812BM042	110	60	1050	2900	200	1.9	20/250	0	75	3.4
86L2B225AB1200	812BM025	110	60	870	2925	115	1.05	12/250	0	72	2.3
86L2B250AA0100	812BM042	110	60	1150	2200	220	2	20/250	0	76	3.1
86L2B280AB0500	812BM042	110	60	1230	2370	300	2.8	30/250	0	75	3
86L4B225AA5900	812BM025	110	60	670	1650	55	0.52	8/250	0	59	2.4
86L4B225AB11A0	812BM025	110	60	550	1700	40	0.38	6/250	0	58	2.4
86L4B250AA4400	812BM042	110	60	890	1600	70	0.7	8/250	0	64	3.4
86L4B280AA11A0	812BM042	110	60	1170	1645	145	1.34	16/250	0	67	3.8
86L4B305AB1100	812BM042	110	60	1520	1645	150	1.37	16/250	0	70	3.5

60Hz 2Pole

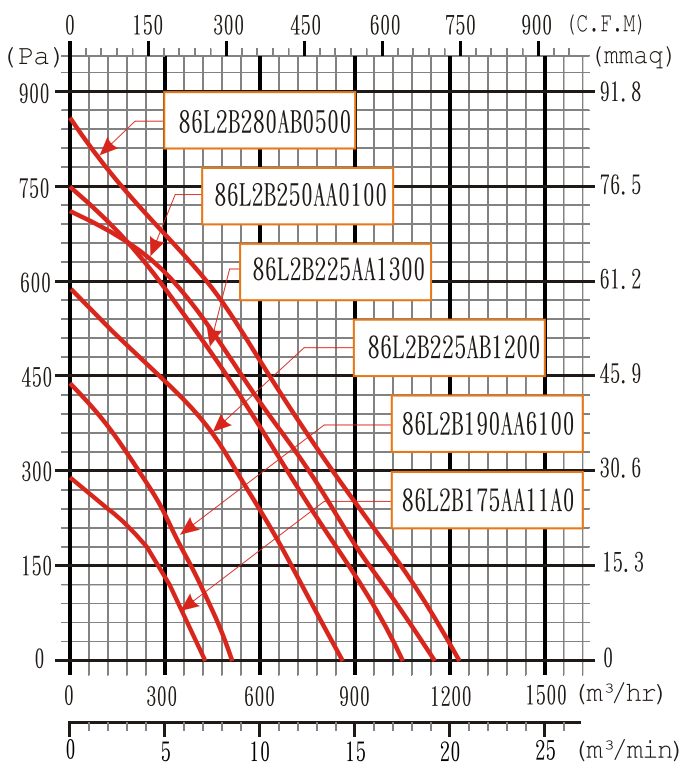

60Hz 4Pole

