




40X40X28mm




General Specifications

Airflow	23.61~33.68 CFM
Static Pressure	44.66~62.52 mm-H2O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #28 AWG

Dimensions:mm

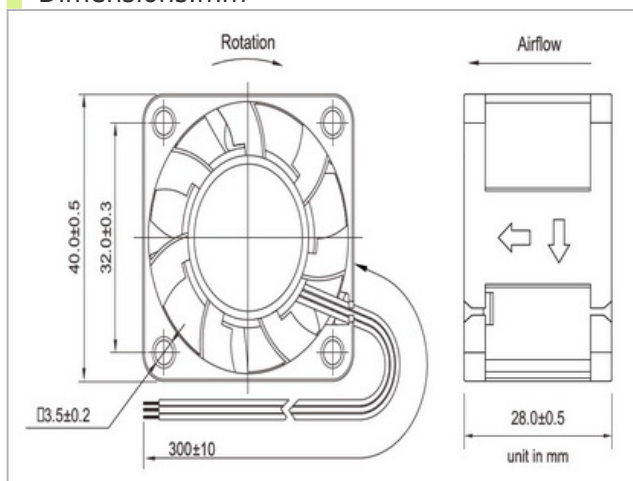

Performance

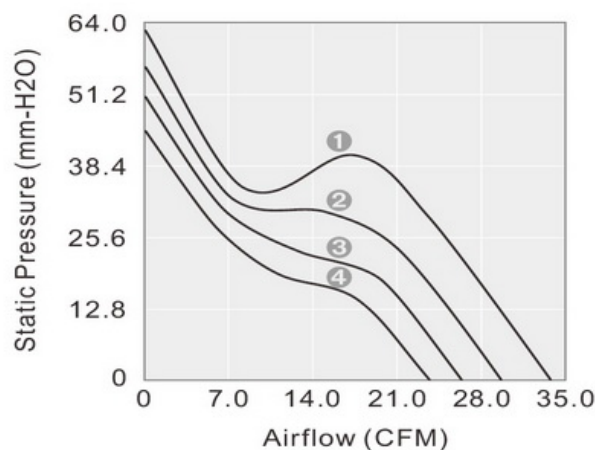

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H2O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD124028MB-E	2BALL	12	7~13.2	17000	23.61	44.66	600	7.20	80000	4	52.5	48.1
GD124028HB-E	2BALL	12	7~13.2	19000	26.26	50.78	900	10.80	75000	3	56.0	48.1
GD124028EB-E	2BALL	12	7~13.2	21000	29.57	56.02	1200	14.40	65000	2	58.0	48.1
GD124028EB-E	2BALL	12	7~13.2	23500	33.68	62.52	1800	21.60	65000	1	61.0	48.1