




80X80X20mm




General Specifications

Airflow	22.7~45.2 CFM
Static Pressure	1.3~4.4 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

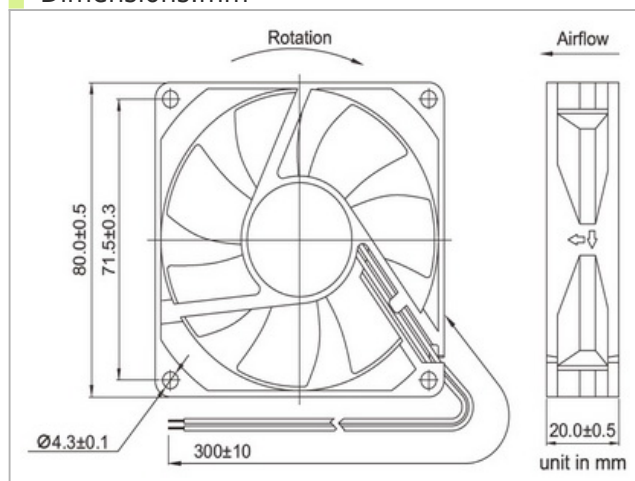

Performace

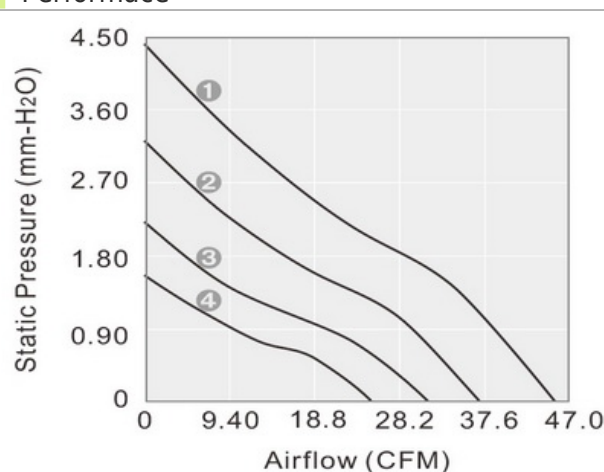

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD128020LB	2BALL	12	7~13.2	2100	23.3	1.4	100	1.20	80000	4	22.9	85
GD128020MB	2BALL	12	7~13.2	2600	31.0	2.2	110	1.32	80000	3	27.0	85
GD128020HB	2BALL	12	7~13.2	3100	36.9	3.2	150	1.80	75000	2	33.5	85
GD128020EB	2BALL	12	7~13.2	3600	45.2	4.4	200	2.40	65000	1	38.0	85
GD128020LL	Sintetico	12	7~13.2	1900	22.8	1.3	50	0.60	50000	4	22.5	85
GD128020ML	Sintetico	12	7~13.2	2400	28.9	1.9	80	0.96	50000	3	25.0	85
GD128020HL	Sintetico	12	7~13.2	2900	34.5	2.7	130	1.56	50000	2	29.1	85
GD128020LS	SLEEVE	12	7~13.2	1900	22.7	1.3	60	0.72	30000	4	22.5	85
GD128020MS	SLEEVE	12	7~13.2	2400	28.9	1.9	90	1.08	30000	3	25.0	85
GD128020HS	SLEEVE	12	7~13.2	2900	34.5	2.7	130	1.56	25000	2	29.5	85
GD248020LB	2BALL	24	12~26.4	2100	23.3	1.4	50	1.20	80000	4	22.9	85
GD248020MB	2BALL	24	12~26.4	2600	31.0	2.2	66	1.58	80000	3	27.0	85
GD248020HB	2BALL	24	12~26.4	3100	36.9	3.2	100	2.40	75000	2	33.5	85
GD248020MS	SLEEVE	24	12~26.4	2400	28.9	1.9	70	1.68	30000	3	25.0	85
GD248020HS	SLEEVE	24	12~26.4	2900	34.5	2.7	100	2.40	25000	2	29.5	85