




120X120X25mm




General Specifications

Airflow	25.6~61.2 CFM
Static Pressure	1.0~2.3 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

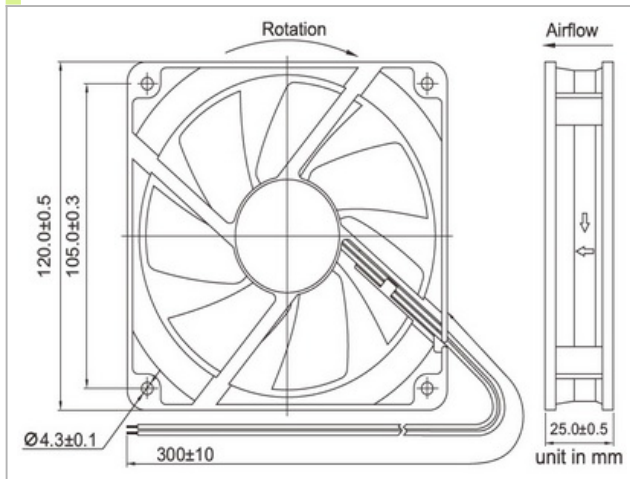

Performace

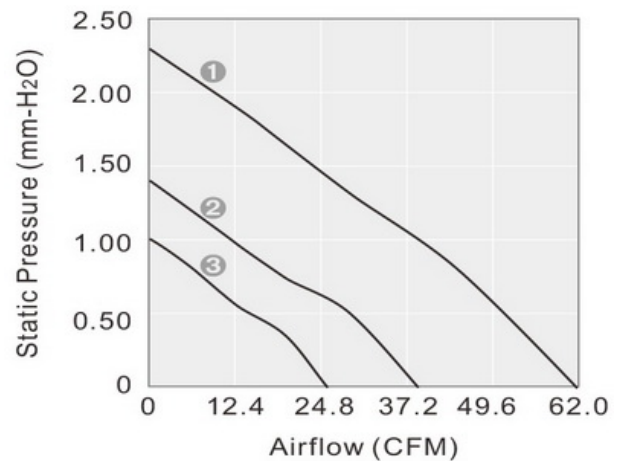

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GM121225LB	2BALL	12	7~13.2	2000	61.2	2.3	180	2.16	80000	1	31.5	118
GM121225LB	2BALL	12	7~13.2	1200	38.4	1.4	70	0.84	80000	2	17.5	118
GM121225LL	Sintetico	12	7~13.2	1200	38.4	1.4	65	0.78	50000	2	17.5	118
GM121225LL	Sintetico	12	7~13.2	800	25.6	1.0	40	0.48	50000	3	16.5	118
GM121225LS	SLEEVE	12	7~13.2	2000	61.2	2.3	180	2.16	30000	1	31.5	118
GM121225LS	SLEEVE	12	7~13.2	1200	38.4	1.4	70	0.84	30000	2	17.5	118
GM121225LS	SLEEVE	12	7~13.2	800	25.6	1.0	40	0.48	30000	3	16.5	118