




172X150x51mm




General Specifications

Airflow	247.5~464.0 CFM
Static Pressure	16.7~52.0 mm-H2O
Blade/Housing	Plastic Material UL 94V-0 P.B.T.
Frame	Die-Casting Aluminum
Lead Wire	UL1007 #22 AWG

Dimensions:mm

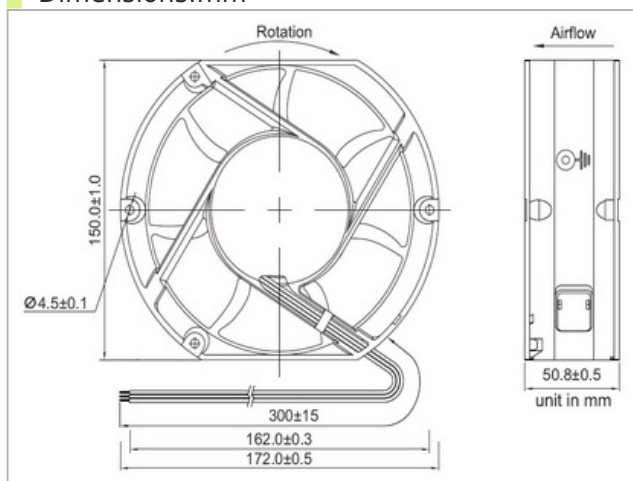

Performance

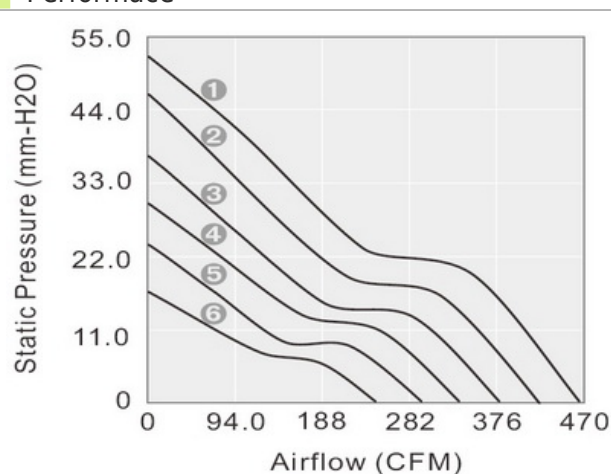

Specifications

Model NO.	Bearing	Rated Voltage	Operating Voltage Range	Speed	Airflow	Static Pressure	Current	Power	Life at 40°C	P-Q Curve	Noise	Weight
		VDC	VDC	RPM	CFM	mm-H2O	mA	W	HOUR		dBA	g
GD121751LB	2BALL	12	7~13.2	3000	247.5	16.7	1800	21.60	80000	6	57.2	1080
GD121751MB	2BALL	12	7~13.2	3500	294.4	23.7	2800	33.60	80000	5	62.1	1080
GD241751LB	2BALL	24	12~26.4	3000	247.5	16.7	850	20.40	80000	6	57.2	1080
GD241751MB	2BALL	24	12~26.4	3500	294.4	23.7	1250	30.00	80000	5	62.1	1080
GD241751HB	2BALL	24	12~26.4	4000	335.4	29.8	1850	40.40	75000	4	63.0	1080
GD241751EB	2BALL	24	12~26.4	4500	379.7	37.1	2700	64.80	65000	3	67.3	1080
GD481751LB	2BALL	48	24~56.0	3000	247.5	16.7	440	21.12	80000	6	57.2	1080
GD481751MB	2BALL	48	24~56.0	3500	294.4	23.7	650	31.20	80000	5	62.1	1080
GD481751HB	2BALL	48	24~56.0	4000	335.4	29.8	950	45.60	75000	4	63.0	1080
GD481751EB	2BALL	48	24~56.0	4500	379.7	37.1	1250	60.00	65000	3	67.3	1080
GD481751EB	2BALL	48	24~56.0	5000	419.9	46.3	1650	79.20	65000	2	71.1	1080
GD481751EB	2BALL	48	24~56.0	5500	464.0	52.0	2400	115.2	65000	1	73.1	1080