




80 x 80 x 25mm




General Specifications

Airflow	17~23 CFM
Housing	Die Cast Aluminum & Zinc
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Wire Leads

Dimensions:mm

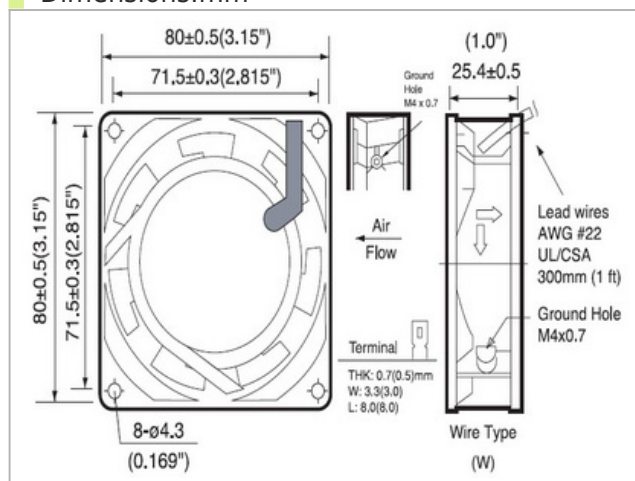

Performance

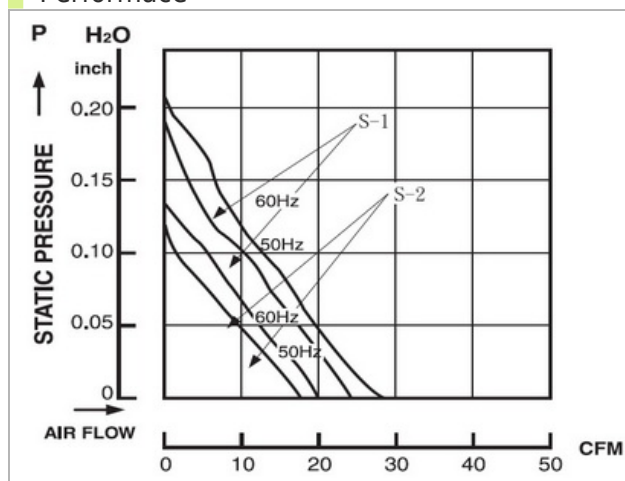

Specifications

Model NO.	Bearing	Rated Voltage VAC	Frequency HZ	Speed RPM	Airflow CFM	Static Pressure Inch-H2O	Current A	Power W	Noise dBA	Weight KG
GA1082HBL	2BALL	110/120	50/60	2400/2800	21/23	0.18/0.21	0.19/0.17	13/14	29/33	0.21
GA1082HSL	SLEEVE	110/120	50/60	2400/2800	21/23	0.18/0.21	0.19/0.17	13/14	29/33	0.21
GA2082HBL	2BALL	220/240	50/60	2400/2800	21/23	0.18/0.21	0.12/0.10	13/14	29/33	0.21
GA2082HSL	SLEEVE	220/240	50/60	2400/2800	21/23	0.18/0.21	0.19/0.17	13/14	29/33	0.21
GA1082MBL	2BALL	110/120	50/60	2100/2500	17/18	0.13/0.14	0.11/0.10	11/10	25/29	0.21
GA1082MSL	SLEEVE	110/120	50/60	2100/2500	17/18	0.13/0.14	0.11/0.10	11/10	25/29	0.21
GA2082MBL	2BALL	220/240	50/60	2100/2500	17/18	0.13/0.14	0.09/0.08	11/10	25/29	0.21
GA2082MSL	SLEEVE	220/240	50/60	2100/2500	17/18	0.13/0.14	0.09/0.08	11/10	25/29	0.21