


162X150X55mm




General Specifications

Housing	Aluminum
Impeller	Steel
Motor Type	DC Permanent Magnet Brushless
Connecting	Lesd Wire
Type of Protection	Insulation Class B, IP54

Dimensions:mm

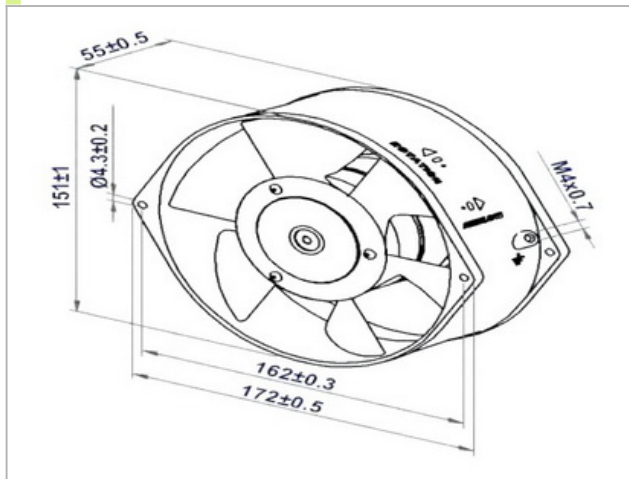

Performace

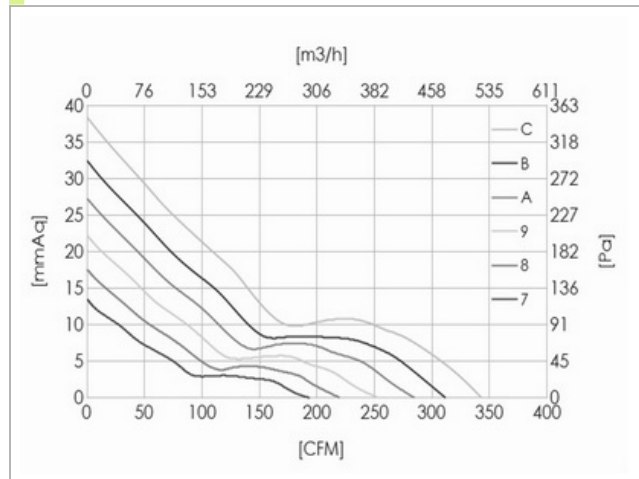

Specifications

Model NO.	Bearing	Rated Voltage	Speed	Airflow	Static Pressure	Current	P-Q Curve	Noise	Weight
		VDC	RPM	CFM	mmAq	A		dBA	g
GD121655LB-S	2BALL	12	2800	195	12.1	1.17	7	59	1040
GD121655MB-S	2BALL	12	3200	230	15.9	1.60	8	62	1040
GD121655HB-S	2BALL	12	3600	260	20.5	2.39	9	65	1040
GD121655EB-S	2BALL	12	4000	295	25.6	2.76	A	68	1040
GD241655LB-S	2BALL	24	2800	195	12.1	0.56	7	59	1040
GD241655MB-S	2BALL	24	3200	230	15.9	0.77	8	62	1040
GD241655HB-S	2BALL	24	3600	260	20.5	1.07	9	65	1040
GD241655EB-S	2BALL	24	4000	295	25.6	1.38	A	68	1040
GD241655UB-S	2BALL	24	4400	325	30.7	1.80	B	71	1040
GD241655XB-S	2BALL	24	4800	345	35.7	2.30	C	74	1040
GD481655LB-S	2BALL	48	2800	195	12.1	0.28	7	59	1040
GD481655MB-S	2BALL	48	3200	230	15.9	0.39	8	62	1040
GD481655HB-S	2BALL	48	3600	260	20.5	0.51	9	65	1040
GD481655EB-S	2BALL	48	4000	295	25.6	0.69	A	68	1040
GD481655UB-S	2BALL	48	4400	325	30.7	0.90	B	71	1040
GD481655XB-S	2BALL	48	4800	345	35.7	1.18	C	74	1040