




120X120X25mm




General Specifications

Airflow	56.5~181.0 CFM
Static Pressure	3.1~24.3 mm-H ₂ O
Blade	Plastic Material UL 94V-0 P.B.T.
Frame	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #22 AWG

Dimensions:mm

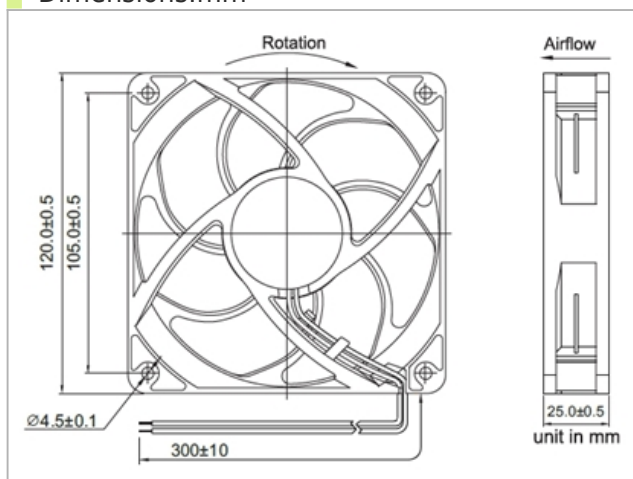

Performance

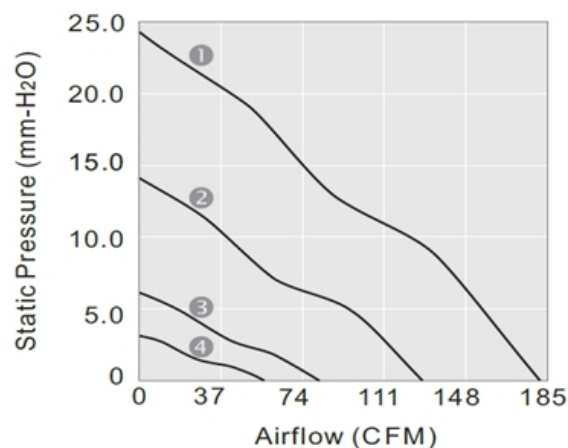

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD121225LB-Q	2BALL	12	7~13.2	2000	56.5	3.1	130	1.56	80000	4	29.3	205
GD121225MB-Q	2BALL	12	7~13.2	2800	81.8	6.0	220	2.64	80000	3	39.1	205
GD121225HB-Q	2BALL	12	7~13.2	4400	127.9	14.1	550	6.60	75000	2	51.4	205
GD121225EB-Q	2BALL	12	7~13.2	6000	181.0	24.3	1300	15.60	65000	1	60.5	205
GD241225LB-Q	2BALL	24	12~26.4	2000	56.5	3.1	85	2.04	80000	4	29.3	205
GD241225MB-Q	2BALL	24	12~26.4	2800	81.8	6.0	130	3.12	80000	3	39.1	205
GD241225HB-Q	2BALL	24	12~26.4	4400	127.9	14.1	320	7.68	75000	2	51.4	205
GD241225EB-Q	2BALL	24	12~26.4	6000	181.0	24.3	700	16.8	65000	1	60.5	205
GD481225LB-Q	2BALL	48	24~56.0	2000	56.5	3.1	60	2.88	80000	4	29.3	205
GD481225MB-Q	2BALL	48	24~56.0	2800	81.8	6.0	85	4.08	80000	3	39.1	205
GD481225HB-Q	2BALL	48	24~56.0	4400	127.9	14.1	180	8.64	75000	2	51.4	205
GD481225EB-Q	2BALL	48	24~56.0	6000	181.0	24.3	400	19.20	65000	1	60.5	205