




92X92X25mm




General Specifications

Airflow	25.9~92.5 CFM
Static Pressure	2.1~20.7 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1007 #24 AWG

Dimensions:mm

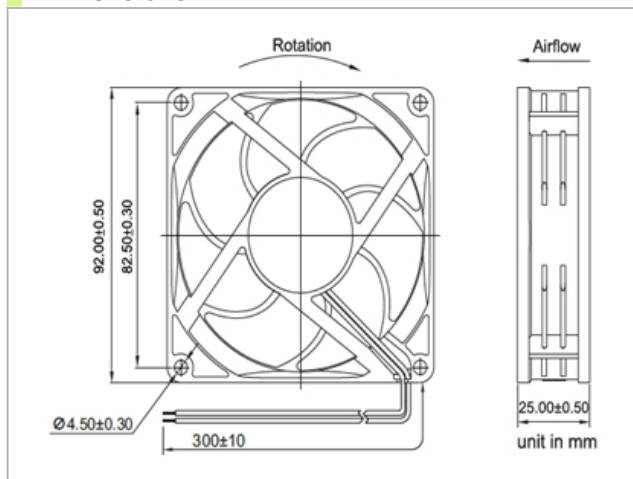

Performance

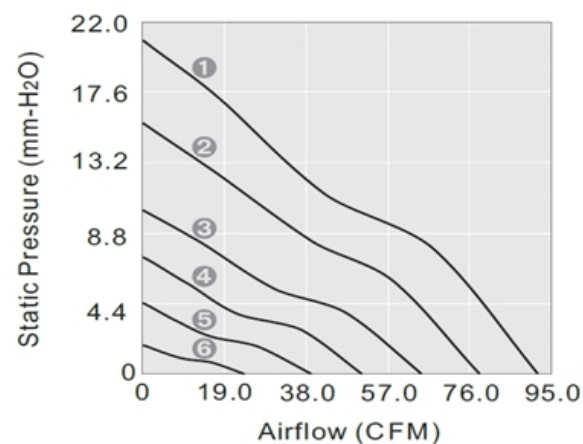

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD129225LB-Q	2BALL	12	7~13.2	2000	25.9	2.1	35	0.42	80000	6	16.7	117.0
GD129225MB-Q	2BALL	12	7~13.2	3000	39.6	4.6	85	1.02	80000	5	28.2	117.0
GD129225HB-Q	2BALL	12	7~13.2	4000	50.3	6.9	145	1.74	75000	4	35.0	117.0
GD129225EB-Q	2BALL	12	7~13.2	5000	64.8	10.3	300	3.60	65000	3	41.3	117.0
GD129225UB-Q	2BALL	12	7~13.2	6000	78.3	15.7	490	5.88	65000	2	46.5	117.0
GD129225SB-Q	2BALL	12	7~13.2	7000	92.5	20.7	750	9.00	60000	1	50.3	117.0
GD249225LB-Q	2BALL	24	12~26.4	2000	25.9	2.1	45	1.08	80000	6	16.7	117.0
GD249225MB-Q	2BALL	24	12~26.4	3000	39.6	4.6	70	1.68	80000	5	28.2	117.0
GD249225HB-Q	2BALL	24	12~26.4	4000	50.3	6.9	100	2.40	75000	4	35.0	117.0
GD249225EB-Q	2BALL	24	12~26.4	5000	64.8	10.3	160	3.84	65000	3	41.3	117.0
GD249225UB-Q	2BALL	24	12~26.4	6000	78.3	15.7	230	5.52	65000	2	46.5	117.0
GD249225SB-Q	2BALL	24	12~26.4	7000	92.5	20.7	340	8.16	60000	1	50.3	117.0
GD489225LB-Q	2BALL	48	24~56.0	2000	25.9	2.1	35	1.68	80000	6	16.7	117.0
GD489225MB-Q	2BALL	48	24~56.0	3000	39.6	4.6	45	2.16	80000	5	28.2	117.0
GD489225HB-Q	2BALL	48	24~56.0	4000	50.3	6.9	70	3.36	75000	4	35.0	117.0
GD489225EB-Q	2BALL	48	24~56.0	5000	64.8	10.3	90	4.32	65000	3	41.3	117.0
GD489225UB-Q	2BALL	48	24~56.0	6000	78.3	15.7	130	6.24	65000	2	46.5	117.0
GD489225SB-Q	2BALL	48	24~56.0	7000	92.5	20.7	180	8.64	60000	1	50.3	117.0