




120X120X25mm




General Specifications

Airflow	57~80 CFM
Housing	Die Cast Aluminum Painted Black Or Natural Color
Impeller	Plastic With Fiber Glass Filled UI 94V-0
Motor Type	Shaded Pole, Impedance Protected
Connecting	Terminal & Wire Leads

Dimensions:mm

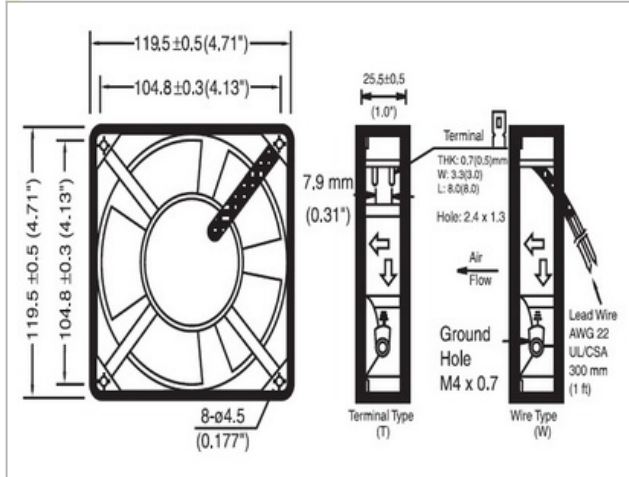

Performace

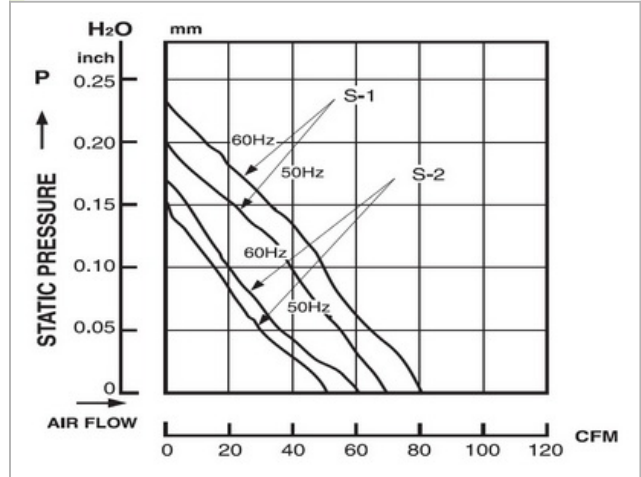

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise
		VAC	HZ	RPM	CFM	Inch-H ₂ O	A	W	dBA
GA1122HBL	2BALL	110/120	50/60	2000/2350	64/80	0.20/0.23	0.19/0.18	18/16	42/44
GA1122HBT	2BALL	110/120	50/60	2000/2350	64/80	0.20/0.23	0.19/0.18	18/16	42/44
GA1122HSL	SLEEVE	110/120	50/60	2000/2350	64/80	0.20/0.23	0.19/0.18	18/16	42/44
GA1122HST	SLEEVE	110/120	50/60	2000/2350	64/80	0.20/0.23	0.19/0.18	18/16	42/44
GA2122HBL	2BALL	220/240	50/60	2000/2350	64/80	0.20/0.23	0.12/0.11	18/16	42/44
GA2122HBT	2BALL	220/240	50/60	2000/2350	64/80	0.20/0.23	0.12/0.11	18/16	42/44
GA2122HSL	SLEEVE	220/240	50/60	2000/2350	64/80	0.20/0.23	0.12/0.11	18/16	42/44
GA2122HST	SLEEVE	220/240	50/60	2000/2350	64/80	0.20/0.23	0.12/0.11	18/16	42/44
GA1122MBL	2BALL	110/120	50/60	1700/1900	57/60	0.16/0.18	0.13/0.11	13/12	34/37
GA2122MBL	2BALL	220/240	50/60	1700/1900	57/60	0.16/0.18	0.09/0.08	13/12	34/37