


172X150X38mm




General Specifications

Housing	Aluminum
Impeller	Steel
Motor Type	AC Induction Capacitor
Connecting	Terminal & Wire Leads
Safety	Thermally Protected (Auto Restart)
Type of Protection	IP54

Dimensions:mm

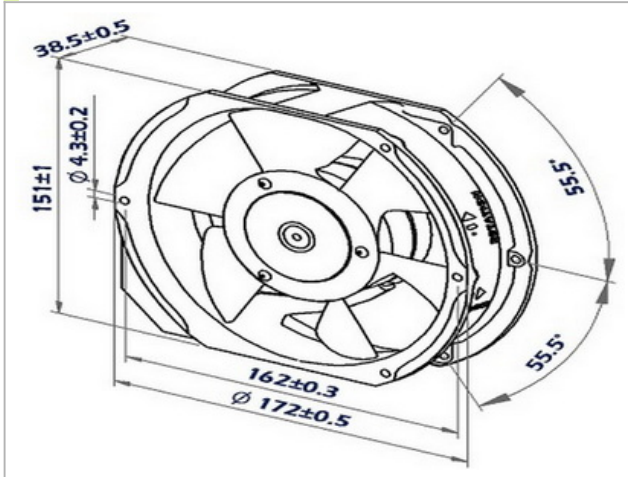

Performace

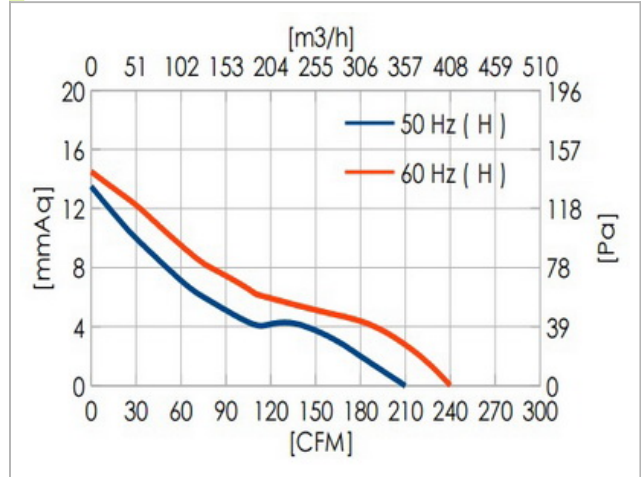

Specifications

Model NO.	Bearing	Rated Voltage	Frequency	Speed	Airflow	Static Pressure	Current	Power	Noise	Weight
		VAC	HZ	RPM	CFM	mmAq	A	W	dBA	g
GA1173HBT-S	2BALL	110/120	50/60	2700/3100	210/240	12.5/14.0	0.25/0.26	29/30	53/59	820
GA1173HBL-S	2BALL	110/120	50/60	2700/3100	210/240	12.5/14.0	0.25/0.26	29/30	53/59	820
GA2173HBT-S	2BALL	220/240	50/60	2700/3100	210/240	12.5/14.0	0.15/0.13	31/29	53/59	820
GA2173HBL-S	2BALL	220/240	50/60	2700/3100	210/240	12.5/14.0	0.15/0.13	31/29	53/59	820
GA3173HBT-S	2BALL	380	50/60	2700/3100	210/240	12.0/11.0	0.06/0.06	22/23	52/58	820
GA3173HBL-S	2BALL	380	50/60	2700/3100	210/240	12.0/11.0	0.06/0.06	22/23	52/58	820
GA4173HBT-S	2BALL	440	50/60	2700/3100	210/240	13.5/14.5	0.08/0.07	29/27	52/59	820
GA4173HBL-S	2BALL	440	50/60	2700/3100	210/240	13.5/14.5	0.08/0.07	29/27	52/59	820
GA4173HBT-S	2BALL	480	50/60	2700/3100	210/240	13.5/14.5	0.07/0.07	33/31	52/58	820
GA4173HBL-S	2BALL	480	50/60	2700/3100	210/240	13.5/14.5	0.07/0.07	33/31	52/58	820