


# Double Inlet Centrifugal Fan


## 110V 2 & 4 Pole Performance

Ball Bearings  
 Insulation F class  
 Protection IP 44  
 Material: Steel Impeller  
 Steel Painted Black Scroll

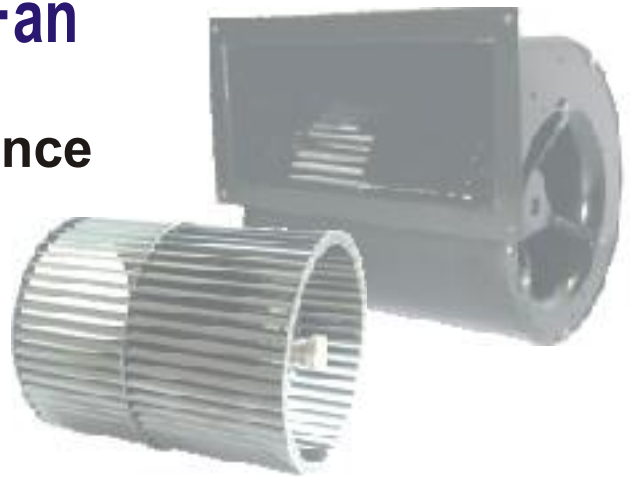

Model type	Motor	V	Hz	M <sup>3</sup> /hr	RPm	Wi	A	μF/Vac	Pa	dB	Kg
86K2B133AA5100	812BM042	110	60	580	1290	165	1.52	20/250	0	56	3.5
86K2B146FA0100	812BM042	110	60	910	1040	250	2.3	20/250	0	63	4.4
86K2B146FA0500	812BM042	110	60	1040	1610	330	3.02	30/250	108	72	4.4
86K4B146FA11A0	812BM035	110	60	790	950	110	1.02	10/250	0	55	4.2
86K4B146FA3800	812BM035	110	60	980	1415	160	1.48	16/250	0	56	4.3
86K4B160AA6000	812BM042	110	60	1210	1380	190	1.73	20/250	0	58	4.5
86K4B180AA0800	812BM060	110	60	1350	860	208	1.92	20/250	0	66	8

**60Hz-2Pole**

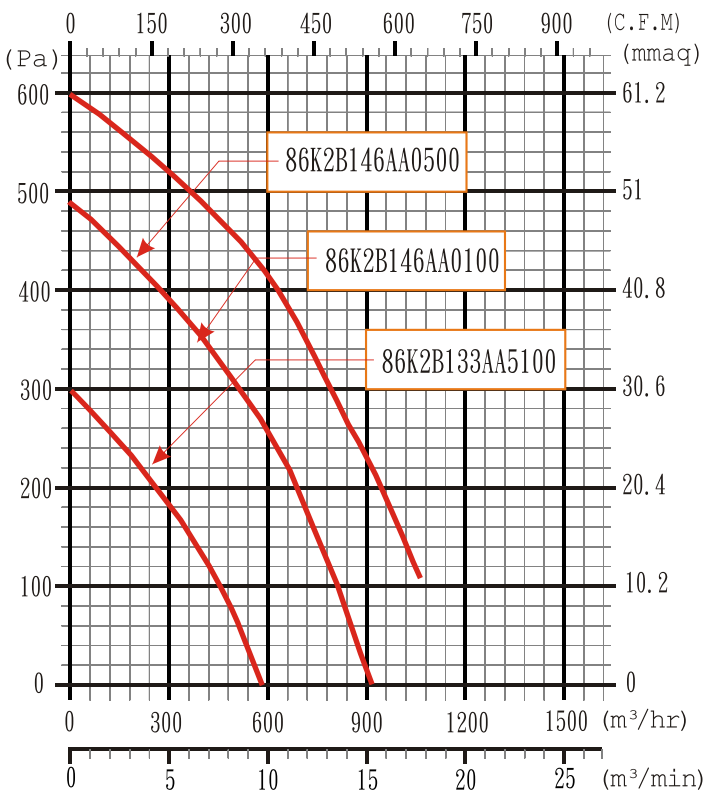

**60Hz-4Pole**

