

三相馬達 / Three Phase AC IP55 60Hz

型號 Model	曲線 編號 Curve No.	頻率 Frequency (Hz)	功率 Output (kW)	電壓 Voltage (V)	滿載額定電流 Current (A)	靜壓 Static pressure Vacuum / Compressor (mbar)	最大風量 Max Airflow (m ³ /min)	噪音 Noise (dB)A	重量 Weight (Kg)
DG-100-16	G12	60	0.2	220-275 Δ/380-480Y	1.0 Δ/0.64Y	70/70	1.2	55	6.5
DG-200-16	G13	60	0.5	220-275 Δ/380-480Y	2.30 Δ/1.30Y	140/160	1.8	61	11
DG-200-16W	G14	60	0.5	220-275 Δ/380-480Y	2.30 Δ/1.30Y	140/150	1.8	61	11.5
DG-300-16	G15	60	0.85	220-275 Δ/380-480Y	3.90 Δ/2.25Y	140/140	3.1	64	14
DG-300-26	G16	60	1.1	220-275 Δ/380-480Y	4.50 Δ/2.60Y	180/180	3.1	64	15
DG-300-16B	G17	60	0.85	220-275 Δ/380-480Y	3.60 Δ/2.10Y	140/140	3.1	64	14
DG-300-16W	G18	60	0.85	220-275 Δ/380-480Y	3.90 Δ/2.25Y	140/140	3.1	64	14.5
DG-300-36	G19	60	1.5	220-275 Δ/380-480Y	5.25 Δ/3.00Y	205/230	3.1	64	16
DG-400-16	G20	60	1.1	220-275 Δ/380-480Y	4.50 Δ/2.60Y	120/110	4.4	73	20.5
DG-400-26	G21	60	1.5	220-275 Δ/380-480Y	6.00 Δ/3.50Y	170/160	4.4	73	22
DG-400-36	G22	60	1.9	220-275 Δ/380-480Y	7.00 Δ/4.00Y	200/200	4.4	73	23
DG-400-36B	G23	60	1.9	220-275 Δ/380-480Y	7.00 Δ/4.00Y	160/180	4.4	73	23
DG-400-36W	G24	60	1.9	220-275 Δ/380-480Y	7.00 Δ/4.00Y	200/200	4.4	73	23.5
DG-400-46	G25	60	2.6	220-275 Δ/380-480Y	9.50 Δ/5.50Y	255/290	4.4	73	26
DG-600-16	G26	60	2.6	220-275 Δ/380-480Y	10.7 Δ/6.20Y	220/200	6.5	77	32
DG-600-16B	G27	60	2.6	220-275 Δ/380-480Y	10.7 Δ/6.20Y	195/200	6.5	77	32
DG-600-16W	G28	60	2.6	220-275 Δ/380-480Y	10.7 Δ/6.20Y	220/200	6.5	77	32.5
DG-600-26	G29	60	3.7	220-275 Δ/380-480Y	13.5 Δ/7.80Y	280/270	6.5	77	34
DG-600-26W	G30	60	3.7	220-275 Δ/380-480Y	13.5 Δ/7.80Y	280/270	6.5	77	35.5
DG-600-36	G31	60	4.6	220-275 Δ/380-480Y	16.2 Δ/9.30Y	315/320	6.5	77	37
DG-800-16	G32	60	6.3	220-275 Δ/380-480Y	29.5 Δ/17.0Y	290/270	11.3	79	77
DG-800-26	G33	60	8.6	220-275 Δ/380-480Y	37.0 Δ/21.3Y	350/395	11.3	79	88
DG-900-16	G34	60	11	220-275 Δ/380-480Y	37.0 Δ/21.4Y	180/170	22.4	81	100
DG-900-26	G35	60	15	220-275 Δ/380-480Y	51.5 Δ/29.8Y	280/270	22.4	81	112
DG-900-36	G36	60	22	220-275 Δ/380-480Y	76.0 Δ/44.0Y	365/420	22.4	81	159
DG-230-16	G37	60	0.85	220-275 Δ/380-480Y	3.60 Δ/2.08Y	245/245	1.8	67	17
DG-330-16	G38	60	1.9	220-275 Δ/380-480Y	7.00 Δ/4.00Y	300/300	3.1	69	25
DG-330-26	G39	60	2.6	220-275 Δ/380-480Y	9.50 Δ/5.50Y	350/420	3.1	69	28
DG-430-16	G40	60	3.7	220-275 Δ/380-480Y	13.5 Δ/7.80Y	370/350	4.4	77	40
DG-430-26	G41	60	4.6	220-275 Δ/380-480Y	16.2 Δ/9.30Y	410/475	4.4	77	43
DG-630-26	G42	60	4.6	220-275 Δ/380-480Y	16.2 Δ/9.30Y	350/350	6.5	79	55
DG-630-36	G43	60	6.3	220-275 Δ/380-480Y	26.5 Δ/15.3Y	420/500	6.5	79	72
DG-630-46	G44	60	8.6	220-275 Δ/380-480Y	37.0 Δ/21.3Y	450/675	6.5	79	82
DG-640-36	G45	60	6.3	220-275 Δ/380-480Y	26.5 Δ/15.3Y	180/170	9.5	79	72
DG-640-46	G46	60	8.6	220-275 Δ/380-480Y	37.0 Δ/21.3Y	260/260	9.5	79	82
DG-830-16	G47	60	8.6	220-275 Δ/380-480Y	37.0 Δ/21.3Y	290/290	11.3	81	112
DG-830-26	G48	60	15	220-275 Δ/380-480Y	52.0 Δ/30.0Y	450/600	11.3	81	142
DG-830-36	G49	60	22	220-275 Δ/380-480Y	76.0 Δ/44.0Y	470/780	11.3	81	160
DG-840-16	G50	60	8.6	220-275 Δ/380-480Y	37.0 Δ/21.3Y	110/110	16.5	81	110
DG-840-26	G51	60	15	220-275 Δ/380-480Y	52.0 Δ/30.0Y	230/200	16.5	81	140
DG-840-36	G52	60	22	220-275 Δ/380-480Y	76.0 Δ/44.0Y	300/280	16.5	81	160

附註 / Remark : 1. 上述資料供參考，如有不同以實品為主。

Information above is for reference, product only when different.

2. 本公司保有設計變更之權利，恕不另行通知。

We reserve the right to change the design without notice.


3. 如有任何疑問請洽經銷商或本公司。

Should you require any further information or assistance, please do not hesitate to contact us or distributors.

60Hz三相曲線圖 / Three Phase Curve

- 單段 / Single Stage
- 雙段 / Two Stage

60Hz(吸 / Vacuum)

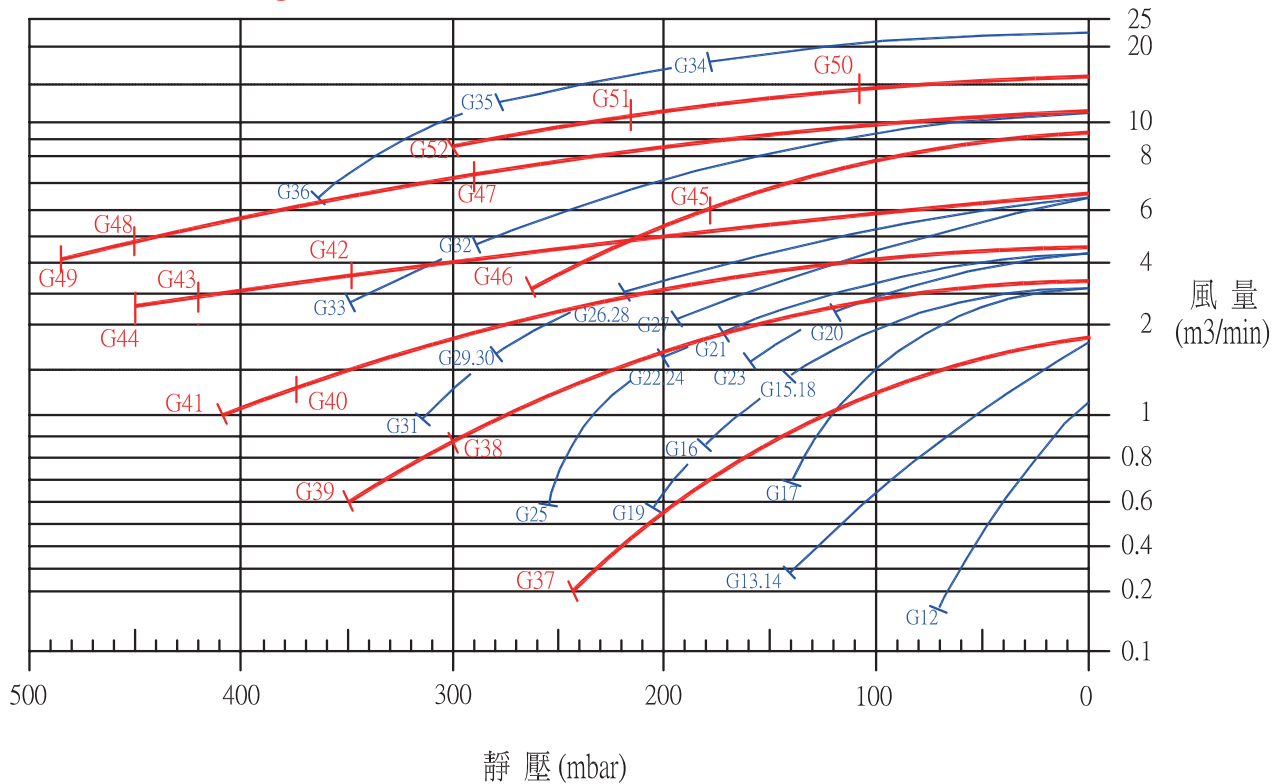

- 單段 / Single Stage
- 雙段 / Two Stage

60Hz(吐 / Compressor)

